


NOTES

1. CONCRETE TO BE 1/2" MAXIMUM CLASS B MIX. (5 SACKS PER CUBIC YD)
2. ADD LAMPBLACK AT 3/4 LB PER CUBIC YD.
3. PROVIDE 3" OF CLASS 2 AB UNLESS OTHERWISE DIRECTED BY THE ENGINEER.
4. TOOL SCORE LINES TRANSVERSLY AT 4 FT INTERVALS UNLESS OTHERWISE DIRECTED.
5. TRANSVERSE SLOPE MAY BE INCREASED (MAX 5/8" PER FT) WHEN DIRECTED BY ENGINEER.
6. CONSTRUCT WEAKENED PLANE JOINTS AT 12 TO 16 FT INTERVALS TO MATCH SCORE LINES.
7. BROOM FINISH UNLESS OTHERWISE DIRECTED.
8. USE PIGMENTED SEALING COMPOUND FOR CURING.
9. CONSTRUCT WEAKENED PLANE JOINTS 3/4" DEEP IN SIDEWALKS, 1" DEEP IN TOP OF CURB AND GUTTER. FINISH EDGES WITH 1/4" EDGING TOOL.
10. DRILL & EPOXY DOWELS (#4 @ 18" O.C. 18" LONG) INTO EXISTING ADJACENT CONCRETE.

(SEE NOTE #9)

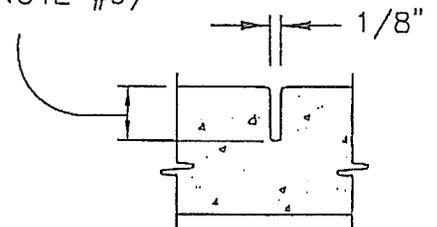

WEAKENED PLANE JOINT

CITY OF EL CERRITO

*Steven E. Strapac* DATE: 10/6/99

STRAPAC CITY ENGINEER REG. C.E. #57654



TITLE: STANDARD CURB & GUTTER, SIDEWALK

DATE: OCTOBER 1999 SCALE: NO SCALE

DRAWN: JLW FILE NO. SHEET NO.

CHECKED: SES LI-25 1 of 1